

# When the heat goes up. . . it's time to cool down!



# AIR CONDITIONER

### Mobile 3-in-1 Air Conditioner

- Control panel with LED display on unit and remote control included
- 3-in-1 System (A/C, Fan and dehumidify)
- Equipped with casters
- 24 hour timer
- Self-evaporative system
- 3 fan and cooling speeds
- Window kit included
- Type: Portable

#### Model No. EA830



Voltage	115 V
Frequency	60 Hz
BTU Rating	12,000
Width	17-1/3"
Depth	12-4/5"
Height	27-1/3"

### Dehumidifier

### Dehumidifier

- Water bucket full indicator
- Omni-directional casters
- 24-hour timer
- Auto restart function and auto defrosting
- Energy-Star Certified
- Washable filter
- LED display



Capacity	70 pt
Tank Capacity	6 L

# LIGHT INDUSTRAIL-DUTY FANS

### Light Industrial Pedestal and Wall Mount Fans

- Two speed, 120 V motor
- All-metal construction, chrome grill stand and base painted black
- Pedestal models feature adjustable height and heavy-duty base for added stability
- Can be used in oscillating or non-oscillating mode
- 6' SJT type power cord
- Stem length for pedestal: 35" 48-3/4"
- Arm length wall: 12-5/8"

Model No.	Description	Base Dia.	НР	CFM High	CFM Low
OSCILLA	TING				
EA282	26" Pedestal	23-3/5"	1/4	7525	4050
EA283	30" Pedestal	27"	1/3	8775	6780
EA284	26" Wall Mount	-	1/4	7525	4050
EA654	30" Wall Mount	-	1/3	8775	6780
NON OSC	NON OSCILLATING				
EA657	26" Pedestal	23-3/5"	1/4	7500	6060
EA571	30" Pedestal	27"	1/3	8000	7000
EA655	26" Wall Mount	-	1/4	7500	6060
EA656	30" Wall Mount	-	1/3	7000	8000



# Industrial-Duty Fan


### Industrial-Duty Air Circulating Fans

- Two speed, 120 V motor
- Fully enclosed motor
- All-metal construction
- Stem length for pedestal: 35" 48-3/4"
- Pedestal models feature adjustable height and a heavy-duty round base for added stability
- Can be used in oscillating & non-oscillating modes
- 9.8' SJT power cord

Model No.	Description	Base Dia.	НР	Voltage	CFM High	CFM Low
OSCILLA	TING					
EA643	24" Pedestal	23-3/5"	1/4	120	11,800	7760
EA647	30" Pedestal	27"	1/3	120	13,200	6700
EA645	24" Wall Mount	-	1/4	120	11,500	7680
EA649	30" Wall Mount	-	1/4	120	10,780	7760
NON-OS	CILLATING					
EA642	24" Pedestal	23-3/5"	1/4	120	11,800	7760
EA646	30" Pedestal	27"	1/4	120	10,780	7440
EA644	24" Wall Mount	-	1/4	120	11,500	7680
EA648	30" Wall Mount	-	1/4	120	10,780	7440
EA048	SU Wall MOUNT	-	1/4	120	10,780	7440



# HEAVY-DUTY OSCILLATING FANS

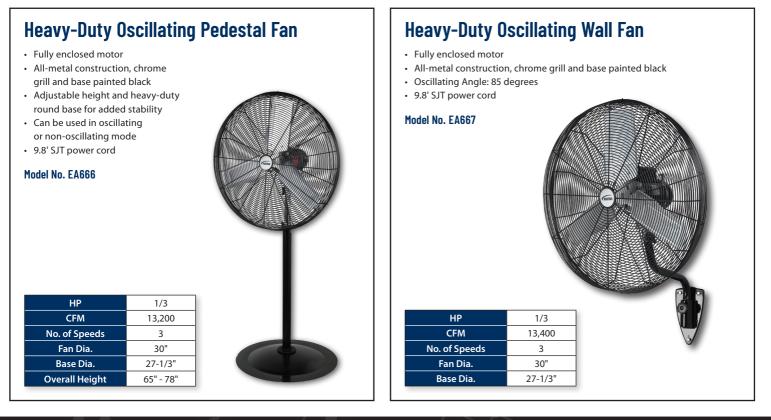

# Oscillating & Misting Fans

### **Outdoor Oscillating Pedestal Fan**

- Enclosed/Waterproof motor type
- All-metal construction, chrome grill stand and base painted black
- Feature adjustable height and heavy-duty round base for added stability
- 9.5' power cord with UL GFCI plug

#### Model No. EA779



### **Misting and Oscillating Pedestal Fan**

- Enclosed/Waterproof motor type (IP44)
- All-metal construction, chrome grill stand and base painted black
- Pedestal models feature a misting hub, adjustable height and heavy-duty round base for added stability
- 9' power cord with UL GFCI plug

HP	1/7	
IIF	1/7	
CFM	3780 - 5470 - 7200	
No. of Speeds	3	
Fan Dia.	30"	
Base Dia.	27"	
Overall Height	65" - 78"	
Watts	220	

HP	1/7	
CFM	3780 - 5470 - 7200	
No. of Speeds	3	
Fan Dia.	30"	
Base Dia.	27"	
Overall Height	62" - 76-3/4"	
Watts	220	



# HIGH VELOCITY FANS

### 20" High Velocity Pedestal Fan

- All-metal construction, chrome grill, black painted base
- Adjustable pedestal height ٠
- Head tilting capability of 360°
- 6' SJT type power cord

#### Model No. EA289



HP	1/5
CFM	3850 - 4550 - 5950
No. of Speeds	3
Fan Dia.	20"
<b>Overall Height</b>	48" - 60"
Volts	120

### 24" Roll-About Fan

- Open motor
- Cart-mounted fan for increased air • circulation and optimal mobility
- Cart and frame configuration provides stable quiet operation
- · Can be tilted/positioned to maximize ventilation
- 9.8' SJT power cord

#### Model No. EA476



НР	1/5
CFM	7040 - 7770 - 10,760
No. of Speeds	3
Fan Dia.	24"
Overall Height	54-1/3"
Volts	120

## Floor Fans

### **High Velocity Floor Fan**

1/5

3

4000 - 4400 - 4900

20"

- Copper motor for longer lifetime
- All-metal construction
- Vertical tilting head

Model No. EA661

### **Floor Fans**

- 3-speed, 120 V/60 Hz, 1/4 HP motor
- All-metal construction
- Chrome finish
- Vertical tilting head



Model No.	Diameter"	CFM High	CFM Med	CFM Low
EA528	16	2370	2050	1730
EA290	18	4725	3850	2975

ΗP

CFM

Fan Dia.

No. of Speeds

### **Rechargeable Indoor/Outdoor Fan with USB port**

- Includes a lithium-ion battery and charger cable
- Power indicator light equipped with 5 LED lights to indicate the battery gauge in every 20%
- This fan has a variable speed setting
- USB charging port on the control box can be used to recharge digital devices
- The fan can pivot forwards to a range of 30° and backwards to a range of 90°
- Fan can be used in both indoor and outdoor conditions
- Re-Charge time: 4-5 Hrs
- USB: 5 V, 1 A

Battery Life	4 - 24 hrs
RPM	1700
CFM	1600
No. of Speeds	3
Fan Dia.	12"
Power	25 W
Volts	24



# Industrial Drum Fans



# OSCILLATING WALL FAN

### High Velocity Oscillating Wall Fan

- Adjustable vertical tilting fan head
- Rotating or fixed air direction
- Sliding switch at front of base



CFM	4000 - 4500 - 4800
No. of Speeds	3
Fan Dia.	20"
Volts	120


# **RECHARGEABLE FAN**

### **Oscillating Tower Fan**

- Power: 40 W
- Wide-angle oscillation
- Stable base
- Diameter: 6"
- No. of Speeds: 3

#### Model No. EA827





# LIGHT DUTY FANS

### 20" Box Fans

- Three speed control, 120 V
- This fan is designed to efficiently circulate airflow to reach desired comfort levels with a three speed-settings feature

3

21-1/2" 120

- · Five slim blades
- Fully assembled and ready to use
- Weight: 10 lbs.
- Top-mounted controls


Model No. EA527

CFM

Volts

No. of Speeds

**Overall Height** 





CFM	1220 - 1400 - 1600 - 940 (ECO)
No. of Speeds	3
Fan Dia.	16"
Volts	120

# Oscillating Fans

### **Oscillating Pedestal Fan**

- 3-speed push button front control
- Adjustable height •
- · Rotating or fixed air direction
- Height: 41" 49"

Model		CFM	CFM	CFM
No.	Diameter"	Low	Medium	High
EA658	16	-	-	1300
EA551	18	1600	1800	2100

# Desk Fans

### **Oscillating Desk Fans**

- Three speed push button control
- · Rotating or fixed air direction
- Topple resistant base
- Portable and easy to assemble



### 6" Clip-on & Desk Fan

MATRIX

- 2-speed, low and high settings
- Fully assembled and ready for use
- · Convertible clip or desk feature
- Tilting head
- Overall Height: 12"

#### Model No. EA304





Model

EA305

EA306

No.

## INDUSTRIAL FAN FORCED HEATER

### **Portable Salamander Heater**

 Manufactured for long lasting, this portable heater for warehouses, factories, garages, construction sites, pavilions and other open areas, raise temperature to the desired level gradually for worksite comfort

240

10,000

34,121

- Fan Motor Type: Enclosed air over, Ball bearing
- Adjustable thermostat
- Adjustable tilt angle
- Mounted on 10" solid rubber wheels
- Over heat protection
- · Easy to move to different areas of the site
- Power Source: Electric
- One heat setting, fan forced
- Power cord length: 10'

#### Model No. EA786

Volts

Watts

BTU/H



011	HEATER	

### **Oil-Filled Heater**

- 7-fin, oil-filled heater
- Three heat settings provide full comfort and efficient operation
- Adjustable thermostat
- Built-in over heating protection and tip over switch
- Power cord length: 6'

Model No. EA612



# Cermiac Oscillating Heaters 2 heat settings (750W/1500W) Optional fan only setting Adjustable Thermostat Built-in over heating protection and tip over switch Power cord length: 6' EB020 EB031

Model No.	Volts	Max. BTU/H	Overall Dimensions	
EB019	240	5200	9.6" H x 6.7" W x 5.0" D	
EB020	240	5200	18.5" H x 7.4" W x 6.9" D	

Volts	120
Watts	1500
BTU/H	2050 - 3080 - 5120
Amps	12.5

# PORTABLE CERAMIC HEATERS

### **Portable Ceramic Heater**

- Full comfort and efficient operation
- Adjustable thermostat
- Big carry handle
- Power Source: Electric
- Power cord length: 6

#### Model No. EA650



Volts	120
Watts	900/1500
BTU/H	2560 - 5200
Amps	6.5/12.5

# PORTABLE CONVECTION HEATER

### **Portable Fan-Forced Convection Heater**

• Two heat settings (1500W & 750W) provide full comfort and efficient operation

> 120 750/1500

2560 - 5200 6.25/12.5

- Adjustable thermostat
- · Wide-angle oscillation
- Tip over safety switch . and thermal limit control

#### Model No. EA597



### **Portable Ceramic Heater**

- Two heat settings provide full comfort and efficient operation
- Adjustable thermostat
- . Convenient carry handle
- Stable metal base with tilt angle .
- Overheat protection
- Power Source: Electric



### **Tilted Heavy Duty Heater**

- Industrial finger proof steel intake/discharge grills
- Durable metal construction
- Adjustable thermostat/energy-saving
- Power cord length: 6'
- Carrying handle

### Model No. EB021

Volts	240
Watts	5600
BTU/H	19,107
Amps	20





Volts

Watts BTU/H

Amps

# PORTABLE FAN-FORCED HEATER

### **Portable Fan-Forced Utility Heater**

- Two heat settings (1300 W and 1500 W) provide full comfort and economic operation
- · Adjustable thermostat
- Fan-only setting • Tip over safety switch
- Built-in carrying handle with front safety guards
- Power cord length: 6

#### Model No. EA598

Volts

Watts

BTU/H

Amps

		MATRIX		
38888				•
	DO NOT C	OVERNE PAS C		2
1000	1500 500	v Contraction		•
-		× 0	•	Y

#### **Portable Fan-Forced/Radiant Utility Heater**

- Three heat settings provides full comfort and efficient operation
- · Chrome-plated safety grill
- Automatic built-in thermostat
- Ceramic core element
- Tip over safety switch and thermal limit
- Power cord length: 6'

#### Model No. EA466

Volts

Watts

BTU/H

Amps



# Portable Ceramic & Coil Heaters

### **Portable Ceramic Heater**

120

750/1500

2560/5200

6.25/12.5

120

1300/1500

4435/5120

10.8/12.5

- Two heat settings provide full comfort and efficient operation
- Adjustable thermostat
- PTC heating element
- Tip over safety switch
- and thermal safety fuse
- Power cord length: 6

Model No. EA599

Volts

Watts

BTU/H

Amps



### **Portable Open Coil Heater**

120

600/900/1500

5.0/7.5/12.5

- Two heat settings
- Fully adjustable automatic thermostat
- Provide full comfort and efficient operation
- Top mounted handle and controls Safety overload switch
- Power signal light • Grounded plug and controls

#### Mo

Model No. EA4	69	
Volts	120	
Watts	1000/1500	
BTU/H	3410/5120	
Amps	8.3/12.5	

11

# HEAVY-DUTY HEATERS

### **Contractor Heaters**

- Built-in thermostat
- · Permanently lubricated motor
- Safety high temperature limit •
- · Built-in handle/cord storage
- · Steel spiral fin brazed to metal sheath elements for maximum heat transfer
- 6' heavy-duty cord



Model No.	Volts	Watts	BTU/H	Amps	Plug Type
EA477	240	5600	19,110	23.34	#6-30P
EA561	240	4800	16,380	20	#6-30P
EB022	240	4000	13,650	20	#6-30P

### **Heavy-Duty Ceiling Mount Heaters**

- Two heat settings
- Built-in ceiling bracket for easy mounting •
- Rugged heavy-duty industrial heaters •
- · Ideal for use in storage rooms, workshops, garages, warehousing
- · Automatic fan delay
- · Overall dimensions: 10-5/8" W x 12-1/2" D x 14" H




Model No.	Volts	Min BTU/H	Max. BTU/H	Max. Wattage	Motor
EA532	240	11,300	17,060	5000 W	Open
EA652	240	17,060	25,600	7500 W	Enclosed

# **DESK HEATERS & WALL CLOCKS**

### Portable Under Desk Radiant Heater

- One heat setting (on & off)
- Thin and lightweight
- Includes fold-out metal floor stand
- Power light indicator with overheat protection .
- Dimensions: 20-1/2" x 16-1/2" x 1"
- Safe to touch surface
- Power cord length: 6'

#### Model No. EA651



### Wall Clocks

- 12/24 hour display
- 12" diameter round office wall clock
- Glass face
- Black chrome frame .
- Batteries required: 1 x AA

#### Model No. HT072

• 12 hour display

office wall clock • Wall mount Plastic face Black plastic frame

Model No. 0P237

.

12-3/4" diameter round





### **WARRANTY & RETURN POLICY**

#### WARRANTY POLICY

The warranty and return policy stated and described below pertain to all products carrying the Matrix Industrial Products® trademark. This warranty supersedes any and all manufacturer's warranties, written or implied. Our sole liability is limited to the repair or replacement of any product proven to be defective in material and/or workmanship and for which a warranty claim is made during the applicable warranty period. No claims for damages of any type will be allowed. All products are sold on this basis. Defective warranted products will be repaired or replaced at our sole discretion at no cost with a new or reconditioned product. This Warranty only applies when the product is used for the purpose for which it was originally designed, under normal operating conditions. This Warranty does not apply to products which have been abused, misused, modified or have been repaired by someone other than us. Discontinued warranted products will be replaced with

products that are similar and available, or we will issue an appropriate credit. The specific warranty coverage for each product is as set out below. **Matrix Industrial Products**<sup>®</sup> are only sold on a wholesale basis and accordingly, warranties only apply to purchasers for resale or for use in their business.

#### **RETURN POLICY**

Please return the COMPLETE tool, freight prepaid, to the **Matrix Industrial Products**<sup>®</sup> distributor where you purchased the product. If you have any questions, please contact your authorized **Matrix Industrial Products**<sup>®</sup> distributor (proof of purchase is required). This Warranty shall be governed by and interpreted in accordance with the laws of Quebec and the laws of Canada applicable therein.



# Contact us Today!

Phone: 1-877-807-7772 Fax: 1-877-807-7775 Visit: www.scnindustrial.com E-mail: info@scnindustrial.com



Catalogue M0419